



Working safely

Manitou is committed to designing machines that provide optimum safety for users.

- **Optimal visibility**
Thanks to the design of the cab and the blind spots corrected by the mirrors.
- **Parking brake**
Automatic with hill start assist to prevent accidents.
- **Joystick with driver presence detection**
To avoid unwanted movements and ensure greater safety on site.
- **Intuitive and intelligent dashboard**
All controls are within easy reach, identified with pictograms and colour codes. The operator is alerted to its maintenance, use and safety by means of notifications.

- **Ergonomic access to the driving position**
Step-free and easy to reach, reducing operator fatigue and the risk of falls.
- **Tilt lock**
To secure your handling.

BUILT TO LAST:

- high quality components
- excellent machine finish
- robust and proven boom and chassis design



Simplified user guide
How-to videos
Reduce Risks supports you in the safe use of your machines



“Lifting power, manoeuvrability, accessibility, you really feel safe in this machine.”

Available from

TOTAL HIRE & SALES



[HIRE](#) | [SALES](#) | [SERVICE](#) | [SUPPORT](#)

LOCAL PEOPLE. REAL SOLUTIONS.



Scan and find out more information on manitou.com

The publication describes the various and confidential data collected by the equipment manufacturer after the installation of the total, generated at an initial stage by the user. This information is used for the purpose of improving the quality of the equipment and the service provided. The publication contains and describes the information for the user to be able to use the equipment in a safe and effective manner. The user must read the publication carefully and follow the instructions. The user must also read the publication carefully and follow the instructions. The user must also read the publication carefully and follow the instructions.

A. Public. Description of the data collected by the equipment manufacturer after the installation of the total.

Ultra compact
**MT
625**

BIG POTENTIAL IN A COMPACT FORMAT



Easy to use and maintain

JSM

Switch and Move Joystick This ergonomically designed joystick is ideal for improving your productivity and performance.



Heavy-duty bonnet

2-piece engine cover for easy daily maintenance. Shock and impact resistant Telene structure. Its compactness allows optimal side and rear visibility for greater safety on the worksite.

Quick start

Easy to use, this machine offers a quick start-up in 2 seconds.

Robustness

Rear lights integrated into the counterweight. Boom cylinder and hose protection.

Access to maintenance

Maintenance information on the dashboard will assist the operator throughout the life cycle of the machine. The large opening of the engine cover on the right side of the machine allows easy access to the various components.

A unique machine combining compactness, performance and robustness

The MT 625 offers you all the advantages of a loader, telehandler and industrial truck in one machine.



Turning radius
3.31m

Operates in the tightest of spaces: material parks, urban or congested construction sites, garage doors, underground car parks, etc.

Optimised dimensions: less than 2m in height and width, and 3.4m for the turning radius.

Ideally suited for construction and urban renovation, the MT 625 is ideal for masonry, carpentry, landscaping, etc.



Performance and versatility at the service of your daily life

Manitou telescopic handlers are true tool carriers thanks to a wide choice of compatible accessories.

Essential bucket

This bucket, dedicated to all construction applications, to move bulk material with a maximum density of 2100kg/m³



Floating fork apron

The essential attachment for handling palletised loads. The forks can be folded for easy transport.



OPTIMIZED ACCESSORIES

Better visibility, performance and lightness to reduce TCO

Big Bag Handler

Total capacity 2400 kg, 4 places of 600 kg each. Welded stops, limit the risk of falling bags.



Sweeper

Floating frame prevents the attachment from being crushed when driving on an uneven surface. 230mm polyester side brush in galvanised steel.



ELEVATION OF PEOPLE

The MT 625 HA can be equipped with two types of platforms (200 kg compact or 365 kg wide)

Hook Stem

Wide range from 4000 kg to 6000 kg. Direct mounting on the machine table. Safety: approved and self-locking swivel hook.



Carrying basket 365kg*

Fixed basket with a capacity of 200 or 365 kg approved for 2 or 3 people. Only compatible with the access versions.



HYDRAULIC LOCK

The optional hydraulic lock allows a non-hydraulic attachment to be changed and secured without leaving the machine.

6m Working height
2.5t Max. Capacity
3.40m Max. Outreach
3 Direction modes



Flexibility and security
The slowing down of the hydraulic movements at the end of the stroke makes it possible to optimise and secure the operations

Hydraulic movements to gain in productivity



Spacious cabin for more comfort



Dashboard simple and intuitive

Simplified use sheets Available in every machine



Turning radius
3,31 m

Heavy-duty, reinforced Telene bonnet

Hydrostatic transmission
The hydrostatic transmission offers smooth and progressive control to position a load with greater precision and safety. This system allows you to tailor the performance of your machine.

Ground clearance
33 cm
High off-road performance



Why go compact?

Compact, powerful and easy-to-use machines for your work! The MT Compact range offers an excellent working envelope. It can be used in confined spaces.


Thanks to the many compatible attachments, this telescopic forklift offers a versatile range on the market. Suitable for off road use, this machine has exceptional load charts. These machines will be your best assets on your construction site! The perfect combination of profitability, safety and reduced TCO!

	MT 625 H	MT 625 HA
Max. capacity (kg)	2500	2500
Max. offset (m)	3.40	3.40
Max. lifting height (m)	5.85	5.85
Engine standard	STAGE V	STAGE V
Power (hp / kW)	75 ch / 55.4 kW	75 ch / 55.4 kW
Engine brand	KUBOTA	KUBOTA
Max. travel speed (km/h)	24.9	24.9
Transmission	Hydrostatic	Hydrostatic
Empty weight (with forks) (kg)	4800	4800
Overall width (m)	1.81	1.81
Overall height (m)	1.92	1.92
Length at deck (m)	3.83	3.83
Ground clearance (m)	0.33	0.33
External turning radius (m)	3.31	3.31

MT 625 H



MT 625 HA

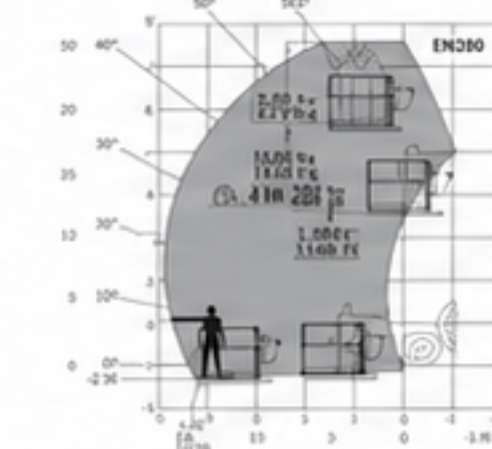

A tailor-made solution adapted to your needs

Discover a wide range of options available to you, ask your Manitou contact for advice.



Compact beacon
Further optimises the compactness of compactness of your



Centralized lubrication
Time saving maintenance with even easier access



35 Km/h version
Boost your performance and your journeys on the road

2 possible finishes
Manitou offers two levels of finish to meet all your needs.

Standard

Comfort



HIRE



SALES



SERVICE



SUPPORT